


4 Function Standard Transmitter

REPLACEMENT TRANSMITTER

92104TX 4 Function Standard Transmitter

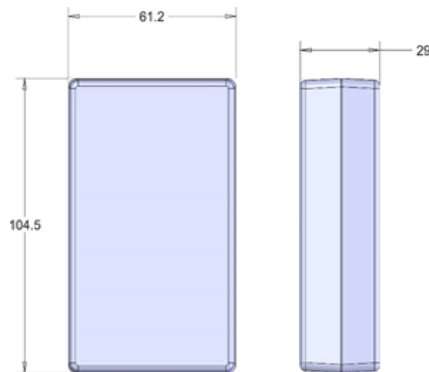

CONTENTS

- 1 x Standard Transmitter
- 1 x Lanyard
- 1 x Cover
- 1 x Instructions

TRANSMITTER SPECIFICATION

ENCLOSURE

| | |
|----------------|---|
| Material | Glass reinforced Nylon |
| Switch Type | 12mm Dome Switch |
| Functions | 4 |
| Identification | Pockets for printed text or image insertion |

RF

| | |
|-------------------|---|
| Modulation | 2-GFSK. Gaussian Frequency Shift Keying |
| Frequency | 433.050 MHz to 434.790 MHz |
| Channels | 1 |
| Channel Selection | Fixed |
| Technology | Hand-held Transmitter |
| Temperature Range | -10° C to + 40° C (13° F to + 104° F). Use Lithium for lower temperatures |
| Range | 60m (200ft) |
| Aerial | Internal – printed on PCB |
| Transmitted power | 1mW Typical |

POWER

| | |
|----------------------|--------------------------|
| Batteries | 1x 9V Alkaline Manganese |
| Quiescent Current | 15µA |
| Current Transmitting | 20mA |

PROTECTION

| | |
|--------------------|-----------------|
| IP Rating | 54 |
| Registration codes | Over 16 million |

INDICATOR

| | |
|------------|--|
| Type | 1 x Red LED |
| Off | Transmitter is OFF and in standby mode |
| Slow flash | Transmitter is ON and ready for use (The SET Button has been pressed and released) |
| On | Transmitting (A STOP, SET or Function Button is being pressed) |
| Fast flash | Transmitting – Indication that the battery will need replacing soon |

COMPLIANCE

| | |
|------|------------------------------------|
| FCC | FCC CFR 47-part 15.231 433.9MHz |
| IC | ISED RSS-210 Issue 8 433.9MHz |
| RoHS | Directive 2011/65/EU |