


2 Function IP Transmitter

REPLACEMENT TRANSMITTER

92202TX 2 Function IP Transmitter



4F Keypad only available

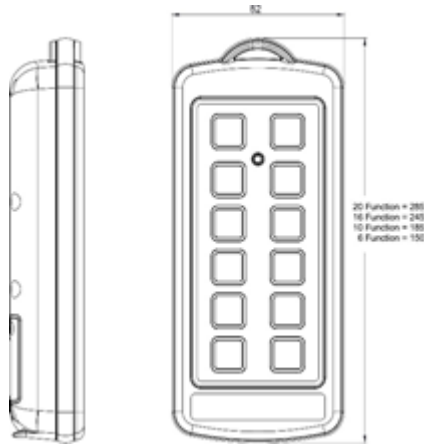

| CONTENTS | |
|-----------------|----------------|
| 1 x | IP Transmitter |
| 1 x | Lanyard |
| 1 x | Instructions |

TRANSMITTER SPECIFICATION

ENCLOSURE

| | |
|----------------|---|
| Material | ABS |
| Switch Type | Tactile Dome on PCB Keypad |
| Functions | 2 |
| Identification | Pockets for printed text or image insertion |

RF

| | |
|-------------------|---|
| Modulation | 2-GFSK. Gaussian Frequency Shift Keying |
| Frequency | 433.050 MHz to 434.790 MHz |
| Channels | 1 |
| Channel Selection | Fixed |
| Technology | Hand-held Transmitter |
| Temperature Range | -10° C to + 40° C (13° F to + 104° F). Use Lithium for lower temperatures |
| Range | 60m (200ft) |
| Aerial | Internal – printed on PCB |
| Transmitted power | 1mW Typical |

POWER

| | |
|----------------------|--|
| Batteries | 4 x AAA Alkaline Manganese in holder (6 Volts) |
| Quiescent Current | 15µA |
| Current Transmitting | 20mA |

PROTECTION

| | |
|--------------------|-----------------|
| IP Rating | 65 |
| Registration codes | Over 16 million |

INDICATOR

| | |
|------------|--|
| Type | 1 x Red LED |
| Off | Transmitter is OFF and in standby mode |
| Slow flash | Transmitter is ON and ready for use (The SET Button has been pressed and released) |
| On | Transmitting (A STOP, SET or Function Button is being pressed) |
| Fast flash | Transmitting – Indication that the battery will need replacing soon |

COMPLIANCE

| | |
|------|------------------------------------|
| FCC | FCC CFR 47-part 15.231 433.9MHz |
| IC | ISED RSS-210 Issue 8 433.9MHz |
| RoHS | Directive 2011/65/EU |